



LEO 100MSC-8cm


- 101MP @8.1fps
- TEC cooling
- Support Windows
- Supports configuration modes of Base, Medium, Full and 80-bit via the CameraLink interface
- Compatible with CameraLink V2.0 Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard.




Applied range • Defect Detection • Surface Patch Detection • Visual Positioning • Size Measuring • QR Code Reading • VR/AR • Logistics

Camera	LEO 100MSC-8cm
Resolution [H*V]	11520 × 8740
Sensor	Sony IM461
Sensor Size	55 mm
Sensor Technology	Rolling, CMOS
Pixel Size [μm]	3.76 × 3.76
Frame Rate [fps]	8.1
Configuration Mode	Base, Medium, Full, 80-bit
Taps	2/4/8/10 Taps
Pixel Clock	85 MHz, 70 MHz, 60 MHz, 40 MHz
Exposure Time	14μs~10s
Dynamic Range	78dB
Mono/Color	Mono
Image Format	ADC 12bit mode: Mono 8/10/12; ADC 16bit mode: Mono 8/10/12/16
Interface	Camera Link (SDR interface)
Programmable Control [ISP]	Image resolution、Exposure time、 Contrast ratio、 Gamma form、 Image rollovers、 Raw、 LUT、 Black level correction
Housing Size [l*w*h]	100.0 × 100.0 × 87.2 mm (1.7kg)
Operating Temperature	-30~70 ° C (Storage), 0~50° C (Working)
Lenses Mount	M72*0.75, BFL 19.55 mm
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, bi-directional custom non-isolated I/O x 1, and RS232 x 1
Power Input	DC 24V
Power Consumption	TEC uncooled: 24V @14W TEC cooling: 24V @48W
Driver	LEO Series Camera Software Suite (iDatum) or Frame Grabber software conforming to GenICam protocol
Operating System	Windows
Conformity	Camera Link Vision, GenICam

Spectral Response

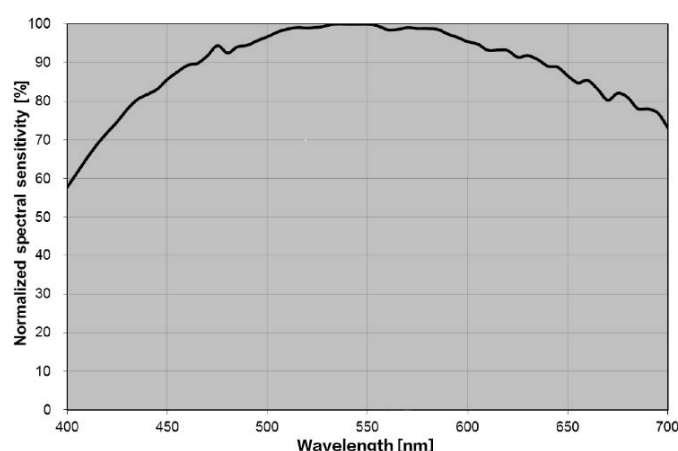

Dimensions

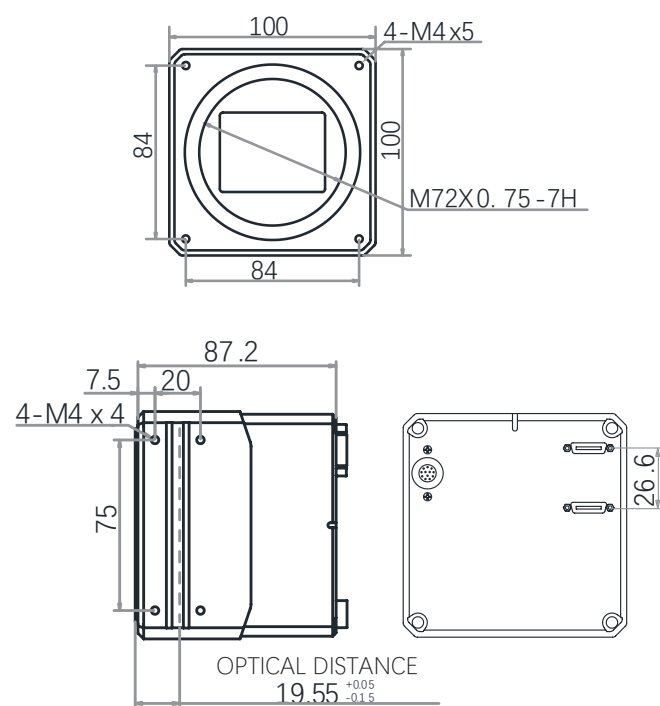

No.8, Xiyuan 9th Road West Lake District, Hangzhou 310030 China
 Tel: 86-571-86888309, 86-571-86888307
 Web: www.visiondatum.com Email: market@visiondatum.com

