


- 2K @44.7 KHz
- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Compatible with GigE Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard
- Support Windows、Linux
- 64 MB local memory for burst transmission and retransmission



Applied range • Printing • Textile • Railway • Logistics • Metallurgy • Food • Pharmaceutical • Material sorting

Camera	Mars2048G-L59gc
Resolution [H*V]	2048 × 3
Sensor Type	CMOS
Pixel Size [μm]	7 × 7
Line Frequency [KHz]	44.7
Data Bit	12bit
Exposure Time	8us~100ms
Dynamic Range	65.5dB
Mono/Color	Color
Image Format	Mono8/BayerRG8/10/12/10P/12P/RGB8P/YUV422
Interface	GigE
Synchronization	Via hardware trigger、software trigger or free run mode
Programmable Control [ISP]	Image resolution、Exposure time、Gamma form、Image rollovers、Raw、LUT
Housing Size [l*w*h]	29 × 44 × 57.5 mm (100g)
Operating Temperature	-30~80 ° C (Storage), -30~50° C (Working)
Lenses Mount	C-Mount
Digital I/O	Differential/Single-ended inputs x 2, Differential outputs x 1, Opto-coupler single-ended input x 1,GPIO x 1
Power Input	DC 12-24V
Power Consumption	4.6W
Driver	Mars Series Camera Software Suite (iCentral) or 3rd party GigE Vision Software
Operating System	Windows, Linux
Conformity	GigE Vision, GenICam

Spectral Response

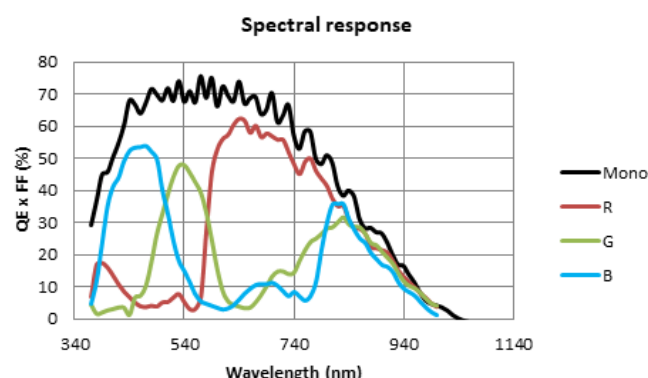

Dimensions

